



Product Specifications

Construction	Patterned Loop
Backing	Nexus® Modular
Dye Method	Solution Dyed
Fiber Type	APEX SDP® Polyester
Face Weight	16 oz./sy (543 grams/m2)
Pile Density	6400 oz./y3 (237.32 kg/m3)
Pattern Repeat	N/A
Gauge	1/10 (3.94 rows/cm)
Standard Size	24" x 24" approx. (60.96cm x 60.96cm)
Standard Adhesive	Commercialon Premium Modular Adhesive
Optional Adhesive	TileTabs
Standard Warranties	Nexus Modular Commercialon Adhesive for Modular Carpet & LVT APEX® SDP Polyester Fiber
Optional Warranties	Commercialon High Moisture Adhesive for Modular Carpet and LVT Tile Tabs


Special Technologies

Environmental Specifications & Tests


NSF 140:	Gold Certified
Total Recycled Content	42.95%
Flooring Radiant Panel	Class 1
Smoke Density	Less than 450 flaming (ASTM E 662)
Static Test	Less than 4 kv (AATCC-134)
ADA Compliance	Compliant For Accessible Routes
Pill Test	Yes
Lightfastness	Yes

Installation Methods: Brick, Quarter Turn, Monolithic, Ashlar


Colorways




3454 Sketch




3455 Vignette




3456 Figurative




3457 Contour



3458 Design




3459 Portray



3460 Layout



3461 Plot



3462 Art





Product Specifications

Construction	Patterned Loop
Backing	Nexus® Modular
Dye Method	Solution Dyed
Fiber Type	APEX SDP® Polyester
Face Weight	18 oz./sy (610 grams/m2)
Pile Density	6416 oz./y3 (237.91 kg/m3)
Pattern Repeat	N/A
Gauge	1/10 (3.94 rows/cm)
Standard Size	24" x 24" approx. (60.96cm x 60.96cm)
Standard Adhesive	Commercialon Premium Carpet Adhesive
Optional Adhesive	TileTabs
Standard Warranties	Nexus Modular Commercialon Adhesive for Modular Carpet & LVT APEX® SDP Polyester Fiber
Optional Warranties	Commercialon High Moisture Adhesive for Modular Carpet and LVT Tile Tabs


Special Technologies

Environmental Specifications & Tests

NSF 140:	Gold Certified
Total Recycled Content	41.8%
Flooring Radiant Panel	Class 1
Smoke Density	Less than 450 flaming (ASTM E 662)
Static Test	Less than 4 kv (AATCC-134)
ADA Compliance	Compliant For Accessible Routes
Pill Test	Yes
Lightfastness	Yes

Installation Methods: Brick, Quarter Turn, Monolithic, Ashlar


Colorways



3135 Indigo



3136 Royal Pur...



3137 Midnight



3138 Chili Red




3139 Crimson




3140 Carob



3142 Sunburst



3143 Medallion




3144 Cyber



3145 Ocean Tro..



3146 Cloud



3147 Parrot



3171 Sky Rocket





Product Specifications

Construction	Patterned Loop
Backing	Nexus® Modular
Dye Method	Solution Dyed
Fiber Type	Encore® SD Nylon
Face Weight	15 oz./sy (509 grams/m2)
Pile Density	5791 oz./y3 (214.73 kg/m3)
Pattern Repeat	N/A
Gauge	1/12 (4.72 rows/cm)
Standard Size	24" x 24" approx. (60.96cm x 60.96cm)
Standard Adhesive	Commercialon Premium Modular Adhesive
Optional Adhesive	TileTabs
Standard Warranties	Nexus Modular Commercialon Adhesive for Modular Carpet & LVT Encore SD Fiber
Optional Warranties	Commercialon High Moisture Adhesive for Modular Carpet and LVT Tile Tabs

Special Technologies

Environmental Specifications & Tests

NSF 140:	Gold Certified
Total Recycled Content	43.54%
Flooring Radiant Panel	Class 1
Smoke Density	Less than 450 flaming (ASTM E 662)
Static Test	Less than 4 kv (AATCC-134)
ADA Compliance	Compliant For Accessible Routes
Pill Test	Yes
Lightfastness	Yes

Installation Methods: Brick, Quarter Turn, Monolithic, Ashlar

Colorways



2128 Eager




2129 Bouncy



2130 Buoyant



2131 Lively



2132 Vibrant




2133 Exuberant



2134 Perky



2135 Bubbly



2136 Vigorous





Product Specifications

Construction	Patterned Loop
Backing	Nexus® Modular
Dye Method	Solution Dyed
Fiber Type	APEX SDP® Polyester
Face Weight	16 oz./sy (543 grams/m2)
Pile Density	5872 oz./y3 (217.74 kg/m3)
Pattern Repeat	24.00" (w) x 24.00" (l) approx. (60.96cm x 60.96cm)
Gauge	1/10 (3.94 rows/cm)
Standard Size	24" x 24" approx. (60.96cm x 60.96cm)
Standard Adhesive	Commercialon Premium Modular Adhesive
Optional Adhesive	TileTabs
Standard Warranties	Nexus Modular Commercialon Adhesive for Modular Carpet & LVT APEX® SDP Polyester Fiber
Optional Warranties	Commercialon High Moisture Adhesive for Modular Carpet and LVT Tile Tabs

Special Technologies

Environmental Specifications & Tests


NSF 140:	Gold Certified
Total Recycled Content	42.95%
Flooring Radiant Panel	Class 1
Smoke Density	Less then 450 flaming (ASTM E 662)
Static Test	Less then 4 kv (AATCC-134)
ADA Compliance	Compliant For Accessible Routes
Pill Test	Yes
Lightfastness	Yes

Installation Methods: Brick, Quarter Turn, Monolithic, Ashlar


Colorways



3410 Symmetry



3411 Geometric



3412 Streamline



3413 Distinction



3414 Architectu..




3415 Neo Gothic



3416 Individual



3417 Aristocratic



3418 Angularity





Product Specifications

Construction	Patterned Loop
Backing	Nexus® Modular
Dye Method	Solution Dyed
Fiber Type	Encore® SD Nylon
Face Weight	16 oz./sy (543 grams/m2)
Pile Density	5836 oz./y3 (216.40 kg/m3)
Pattern Repeat	N/A
Gauge	1/12 (4.72 rows/cm)
Standard Size	24" x 24" approx. (60.96cm x 60.96cm)
Standard Adhesive	Commercialon Premium Modular Adhesive
Optional Adhesive	TileTabs
Standard Warranties	Nexus Modular Commercialon Adhesive for Modular Carpet & LVT Encore SD Fiber
Optional Warranties	Commercialon High Moisture Adhesive for Modular Carpet and LVT Tile Tabs

Special Technologies

Environmental Specifications & Tests

NSF 140:	Gold Certified
Total Recycled Content	42.95%
Flooring Radiant Panel	Class 1
Smoke Density	Less than 450 flaming (ASTM E 662)
Static Test	Less than 4 kv (AATCC-134)
ADA Compliance	Compliant For Accessible Routes
Pill Test	Yes
Lightfastness	Yes

Installation Methods: Brick, Quarter Turn, Monolithic, Ashlar

Colorways



2119 Junctione



2120 Rampart



2121 Sector



2122 Zone



2123 Parcel



2124 Gridlock



2125 District



2126 Quarter



2127 Division





Product Specifications

Construction	Textured Loop
Backing	Nexus® Modular
Dye Method	Solution Dyed
Fiber Type	APEX SDP® Polyester
Face Weight	15 oz./sy (509 grams/m2)
Pile Density	8627 oz./y3 (319.89 kg/m3)
Pattern Repeat	N/A
Gauge	1/10 (3.94 rows/cm)
Standard Size	24" x 24" approx. (60.96cm x 60.96cm)
Standard Adhesive	Commercialon Premium Modular Adhesive
Optional Adhesive	TileTabs
Standard Warranties	Nexus Modular Commercialon Adhesive for Modular Carpet & LVT APEX® SDP Polyester Fiber
Optional Warranties	Commercialon High Moisture Adhesive for Modular Carpet and LVT Tile Tabs

Special Technologies

Environmental Specifications & Tests

NSF 140:	Gold Certified
Total Recycled Content	43.54%
Flooring Radiant Panel	Class 1
Smoke Density	Less than 450 flaming (ASTM E 662)
Static Test	Less than 4 kv (AATCC-134)
ADA Compliance	Compliant For Accessible Routes
Pill Test	Yes
Lightfastness	Yes

Installation Methods: Brick, Quarter Turn, Monolithic, Ashlar

Colorways

 2972 Data Link	 2973 Connection	 2974 Application	 2975 Nature	 2976 Packet	 2977 Session
 3165 Satellite	 3166 Router	 3167 Coaxial	 3168 Hardware	 3169 Gateway	 3170 Modem





Product Specifications

Construction	Patterned Loop
Backing	Nexus® Modular
Dye Method	Solution Dyed
Fiber Type	Encore® SD Nylon
Face Weight	15 oz./sy (509 grams/m2)
Pile Density	7565 oz./y3 (280.52 kg/m3)
Pattern Repeat	N/A
Gauge	1/12 (4.72 rows/cm)
Standard Size	24" x 24" approx. (60.96cm x 60.96cm)
Standard Adhesive	Commercialon Premium Modular Adhesive
Optional Adhesive	TileTabs
Standard Warranties	Nexus Modular Commercialon Adhesive for Modular Carpet & LVT Encore SD Fiber
Optional Warranties	Commercialon High Moisture Adhesive for Modular Carpet and LVT Tile Tabs

Special Technologies

Environmental Specifications & Tests


NSF 140:	Gold Certified
Total Recycled Content	43.54%
Flooring Radiant Panel	Class 1
Smoke Density	Less than 450 flaming (ASTM E 662)
Static Test	Less than 4 kv (AATCC-134)
ADA Compliance	Compliant For Accessible Routes
Pill Test	Yes
Lightfastness	Yes

Installation Methods: Quarter Turn

Colorways



2162 Anchors



2163 Deck




2164 Braced Pa...



2165 Foundation



2166 Ties



2167 Struts



2168 Truss





Product Specifications

Construction	Level Loop
Backing	Nexus® Modular
Dye Method	Solution Dyed
Fiber Type	Encore® SD Nylon
Face Weight	20 oz./sy (678 grams/m2)
Pile Density	7378 oz./y3 (273.58 kg/m3)
Pattern Repeat	N/A
Gauge	1/10 (3.94 rows/cm)
Standard Size	24" x 24" approx. (60.96cm x 60.96cm)
Standard Adhesive	Commercialon Premium Modular Adhesive
Optional Adhesive	TileTabs
Standard Warranties	Nexus Modular Commercialon Adhesive for Modular Carpet & LVT Encore SD Fiber
Optional Warranties	Commercialon High Moisture Adhesive for Modular Carpet and LVT Tile Tabs

Special Technologies

Environmental Specifications & Tests

NSF 140:	Gold Certified
Total Recycled Content	40.71%
Flooring Radiant Panel	Class 1
Smoke Density	Less then 450 flaming (ASTM E 662)
Static Test	Less then 4 kv (AATCC-134)
ADA Compliance	Compliant For Accessible Routes
Pill Test	Yes
Lightfastness	Yes

Installation Methods: Brick, Quarter Turn, Monolithic, Ashlar

Colorways

 2641 Loyal	 2642 Nobel	 2643 Courteous	 2644 Honor	 2645 Character	 2646 Thoughtful
 2647 Faithful	 2648 Romantic	 2649 Defender	 2650 Truthful	 2651 Humility	 2652 Respectful
 2653 Justice	 2654 Gentleman	 2655 Generous	 2656 Humanity		





Product Specifications

Construction	Level Loop
Backing	Nexus® Modular
Dye Method	Solution Dyed
Fiber Type	Encore® SD Nylon
Face Weight	15 oz./sy (509 grams/m2)
Pile Density	5482 oz./y3 (203.28 kg/m3)
Pattern Repeat	N/A
Gauge	1/12 (4.72 rows/cm)
Standard Size	24" x 24" approx. (60.96cm x 60.96cm)
Standard Adhesive	Commercialon Premium Modular Adhesive
Optional Adhesive	TileTabs
Standard Warranties	Nexus Modular Commercialon Adhesive for Modular Carpet & LVT Encore SD Fiber
Optional Warranties	Commercialon High Moisture Adhesive for Modular Carpet and LVT Tile Tabs

Special Technologies

Environmental Specifications & Tests

NSF 140:	Gold Certified
Total Recycled Content	43.54%
Flooring Radiant Panel	Class 1
Smoke Density	Less then 450 flaming (ASTM E 662)
Static Test	Less then 4 kv (AATCC-134)
ADA Compliance	Compliant For Accessible Routes
Pill Test	Yes
Lightfastness	Yes

Installation Methods: Quarter Turn

Colorways



3135 Indigo



3136 Royal Pur...




3137 Midnight



3138 Red



3139 Crimson



3140 Carob



3141 Matte Lake



3142 Sunburst



3143 Medallion



3144 Cyber



3145 Tropic



3146 Cloud



3147 Parrot





Product Specifications

Construction	Textured Loop
Backing	Nexus® Modular
Dye Method	Solution Dyed
Fiber Type	APEX SDP® Polyester
Face Weight	18 oz./sy (610 grams/m2)
Pile Density	6000 oz./y3 (222.48 kg/m3)
Pattern Repeat	N/A
Gauge	1/12 (4.72 rows/cm)
Standard Size	24" x 24" approx. (60.96cm x 60.96cm)
Standard Adhesive	Commercialon Premium Modular Adhesive
Optional Adhesive	TileTabs
Standard Warranties	Nexus Modular Commercialon Adhesive for Modular Carpet & LVT APEX® SDP Polyester Fiber
Optional Warranties	Commercialon High Moisture Adhesive for Modular Carpet and LVT Tile Tabs
















Special Technologies

Environmental Specifications & Tests

NSF 140:	Gold Certified
Total Recycled Content	41.8%
Flooring Radiant Panel	Class 1
Smoke Density	Less than 450 flaming (ASTM E 662)
Static Test	Less than 4 kv (AATCC-134)
ADA Compliance	Compliant For Accessible Routes
Pill Test	Yes
Lightfastness	Yes

Installation Methods: Brick, Quarter Turn, Monolithic, Ashlar

Colorways

 3200 Cloud	 3201 Smoke	 3202 Tortilla	 3203 Oyster	 3204 Fossil	 3205 Iron
 3206 Hazlenut	 3207 Parchment	 3208 Flint	 3209 Indigo	 3210 Charcoal	 3211 Denim
 3212 Hickory	 3213 Peanut	 3214 Granola			





Product Specifications

Construction	Textured Loop
Backing	Nexus® Modular
Dye Method	Solution Dyed
Fiber Type	Encore® SD Nylon
Face Weight	20 oz./sy (678 grams/m2)
Pile Density	7165 oz./y3 (265.68 kg/m3)
Pattern Repeat	N/A
Gauge	1/10 (3.94 rows/cm)
Standard Size	24" x 24" approx. (60.96cm x 60.96cm)
Standard Adhesive	Commercialon Premium Modular Adhesive
Standard Warranties	Nexus Modular Commercialon Adhesive for Modular Carpet & LVT Encore SD Fiber
Optional Warranties	Commercialon High Moisture Adhesive for Modular Carpet and LVT

Special Technologies

Environmental Specifications & Tests

NSF 140:	Gold Certified
Total Recycled Content	40.71%
Flooring Radiant Panel	Class 1
Smoke Density	Less than 450 flaming (ASTM E 662)
Static Test	Less than 4 kv (AATCC-134)
ADA Compliance	Compliant For Accessible Routes
Pill Test	Yes
Lightfastness	Yes

Installation Methods: Brick, Quarter Turn, Monolithic, Ashlar

Colorways

 2040 Offbeat	 2041 Unique	 2042 Discrete	 2043 Muddled	 2044 Varied	 2045 Contrary
 2046 Novel	 2047 Jumbled	 2048 Mingled	 2049 Composite	 2050 Bizarre	 2051 Distinct





Product Specifications

Construction	Patterned Loop
Backing	Nexus® Modular
Dye Method	Solution Dyed
Fiber Type	APEX SDP® Polyester
Face Weight	16 oz./sy (543 grams/m2)
Pile Density	7958 oz./y3 (295.09 kg/m3)
Pattern Repeat	N/A
Gauge	1/12 (4.72 rows/cm)
Standard Size	24" x 24" approx. (60.96cm x 60.96cm)
Standard Adhesive	Commercialon Premium Modular Adhesive
Optional Adhesive	TileTabs
Standard Warranties	Nexus Modular Commercialon Adhesive for Modular Carpet & LVT APEX® SDP Polyester Fiber
Optional Warranties	Commercialon High Moisture Adhesive for Modular Carpet and LVT Tile Tabs






Special Technologies

Environmental Specifications & Tests


NSF 140:	Gold Certified
Total Recycled Content	42.95%
Flooring Radiant Panel	Class 1
Smoke Density	Less than 450 flaming (ASTM E 662)
Static Test	Less than 4 kv (AATCC-134)
ADA Compliance	Compliant For Accessible Routes
Pill Test	Yes
Lightfastness	Yes

Installation Methods: Brick, Quarter Turn, Monolithic, Ashlar

Colorways

 3135 Indigo	 3136 Royal Pur...	 3137 Midnight	 3138 Chili Red	 3139 Crimson	 3140 Carob
 3141 Matte Lake	 3142 Sunburst	 3143 Medallion	 3144 Cyber	 3145 Ocean Tro..	 3146 Cloud
 3147 Parrot	 3171 Skyrocket				



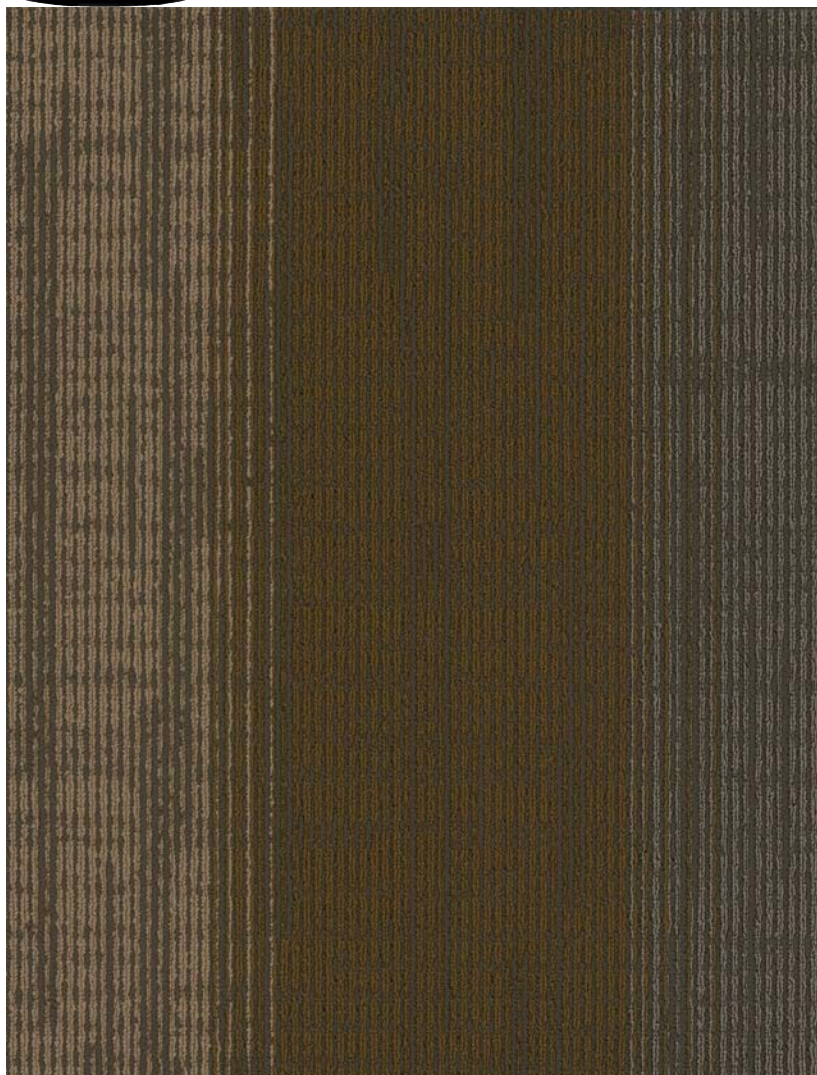

Product Specifications

Construction	Patterned Loop
Backing	Nexus® Modular
Dye Method	Solution Dyed
Fiber Type	Encore® SD Nylon
Face Weight	15 oz./sy (509 grams/m2)
Pile Density	6153 oz./y3 (228.16 kg/m3)
Pattern Repeat	N/A
Gauge	1/12 (4.72 rows/cm)
Standard Size	24" x 24" approx. (60.96cm x 60.96cm)
Standard Adhesive	Commercialon Premium Modular Adhesive
Optional Adhesive	TileTabs
Standard Warranties	Nexus Modular Commercialon Adhesive for Modular Carpet & LVT Encore SD Fiber
Optional Warranties	Commercialon High Moisture Adhesive for Modular Carpet and LVT Tile Tabs

Special Technologies

Environmental Specifications & Tests


NSF 140:	Gold Certified
Total Recycled Content	43.54%
Flooring Radiant Panel	Class 1
Smoke Density	Less than 450 flaming (ASTM E 662)
Static Test	Less than 4 kv (AATCC-134)
ADA Compliance	Compliant For Accessible Routes
Pill Test	Yes
Lightfastness	Yes

Installation Methods: Brick, Quarter Turn, Monolithic, Ashlar

Colorways




3052 Ecliptic




3053 Zodiac



3054 Galaxy



3055 Aurora



3057 Juno




3058 Ceres



3059 Nadir



3060 Zenith



3061 Cosmic





Product Specifications

Construction	Textured Loop
Backing	Nexus® Modular
Dye Method	Solution Dyed
Fiber Type	APEX SDP® Polyester
Face Weight	26 oz./sy (882 grams/m2)
Pile Density	7698 oz./y3 (285.45 kg/m3)
Pattern Repeat	N/A
Gauge	1/10 (3.94 rows/cm)
Standard Size	24" x 24" approx. (60.96cm x 60.96cm)
Standard Adhesive	Commercialon Premium Modular Adhesive
Optional Adhesive	TileTabs
Standard Warranties	Nexus Modular Commercialon Adhesive for Modular Carpet & LVT APEX® SDP Polyester Fiber
Optional Warranties	Commercialon High Moisture Adhesive for Modular Carpet and LVT Tile Tabs

Special Technologies

Environmental Specifications & Tests


NSF 140:	Gold Certified
Total Recycled Content	37.77%
Flooring Radiant Panel	Class 1
Smoke Density	Less than 450 flaming (ASTM E 662)
Static Test	Less than 4 kv (AATCC-134)
ADA Compliance	Compliant For Accessible Routes
Pill Test	Yes
Lightfastness	Yes

Installation Methods: Quarter Turn


Colorways




1418 Fallow



1419 Café




1420 Pitch



1421 Nickel



1422 Onyx



1423 Noir





Product Specifications

Construction	Patterned Loop
Backing	Nexus® Modular
Dye Method	Solution Dyed
Fiber Type	Encore® SD Nylon
Face Weight	15 oz./sy (509 grams/m2)
Pile Density	5033 oz./y3 (186.63 kg/m3)
Pattern Repeat	N/A
Gauge	1/12 (4.72 rows/cm)
Standard Size	24" x 24" approx. (60.96cm x 60.96cm)
Standard Adhesive	Commercialon Premium Modular Adhesive
Optional Adhesive	TileTabs
Standard Warranties	Nexus Modular Commercialon Adhesive for Modular Carpet & LVT Encore SD Fiber
Optional Warranties	Commercialon High Moisture Adhesive for Modular Carpet and LVT Tile Tabs


Special Technologies

Environmental Specifications & Tests

NSF 140:	Gold Certified
Total Recycled Content	43.54%
Flooring Radiant Panel	Class 1
Smoke Density	Less than 450 flaming (ASTM E 662)
Static Test	Less than 4 kv (AATCC-134)
ADA Compliance	Compliant For Accessible Routes
Pill Test	Yes
Lightfastness	Yes

Installation Methods: Brick, Quarter Turn, Monolithic, Ashlar

Colorways



3111 Ethos




3112 Nucleus




3113 Lifeblood




3114 Core




3115 Substance



3116 Spirit



3117 Quintesse...



3118 Nature



3119 Soul





Product Specifications

Construction	Textured Loop
Backing	Nexus® Modular
Dye Method	Solution Dyed
Fiber Type	APEX SDP® Polyester
Face Weight	15 oz./sy (509 grams/m2)
Pile Density	5133 oz./y3 (190.33 kg/m3)
Pattern Repeat	N/A
Gauge	1/10 (3.94 rows/cm)
Standard Size	24" x 24" approx. (60.96cm x 60.96cm)
Standard Adhesive	Commercialon Premium Modular Adhesive
Optional Adhesive	TileTabs
Standard Warranties	Nexus Modular Commercialon Adhesive for Modular Carpet & LVT APEX® SDP Polyester Fiber
Optional Warranties	Commercialon High Moisture Adhesive for Modular Carpet and LVT Tile Tabs

Special Technologies

Environmental Specifications & Tests

NSF 140:	Gold Certified
Total Recycled Content	43.54%
Flooring Radiant Panel	Class 1
Smoke Density	Less than 450 flaming (ASTM E 662)
Static Test	Less than 4 kv (AATCC-134)
ADA Compliance	Compliant For Accessible Routes
Pill Test	Yes
Lightfastness	Yes

Installation Methods: Brick, Quarter Turn, Monolithic, Ashlar


Colorways




2144 Buzzer Be...



2145 Alley-Oop




2146 Give-and-...



2147 Coast-to-...



2148 Run-and-...



2149 Lay-Up



2150 Slam Dunk



2151 Dunk Shot



2152 Three Poi...





Product Specifications

Construction	Patterned Loop
Backing	Nexus® Modular
Dye Method	Solution Dyed
Fiber Type	Encore® SD Nylon
Face Weight	14 oz./sy (475 grams/m2)
Pile Density	7300 oz./y3 (270.69 kg/m3)
Pattern Repeat	N/A
Gauge	1/12 (4.72 rows/cm)
Standard Size	24" x 24" approx. (60.96cm x 60.96cm)
Standard Adhesive	Commercialon Premium Modular Adhesive
Optional Adhesive	TileTabs
Standard Warranties	Nexus Modular Commercialon Adhesive for Modular Carpet & LVT Encore SD Fiber
Optional Warranties	Commercialon High Moisture Adhesive for Modular Carpet and LVT Tile Tabs

Special Technologies

Environmental Specifications & Tests

NSF 140:	Gold Certified
Total Recycled Content	44.15%
Flooring Radiant Panel	Class 1
Smoke Density	Less then 450 flaming (ASTM E 662)
Static Test	Less then 4 kv (AATCC-134)
ADA Compliance	Compliant For Accessible Routes
Pill Test	Yes
Lightfastness	Yes

Installation Methods: Quarter Turn

Colorways

 1873 Company	 1874 Array	 1875 Channel	 1876 Rank	 1877 Regiment	 1878 Command
 1879 Organizat...	 1880 Order	 1881 Magazine	 1882 Squad	 1883 Trench	 1884 Division





Product Specifications

Construction	Patterned Loop
Backing	Nexus® Modular
Dye Method	Solution Dyed
Fiber Type	APEX SDP® Polyester
Face Weight	20 oz./sy (678 grams/m2)
Pile Density	5414 oz./y3 (200.75 kg/m3)
Pattern Repeat	N/A
Gauge	1/12 (4.72 rows/cm)
Standard Size	24" x 24" approx. (60.96cm x 60.96cm)
Standard Adhesive	Commercialon Premium Modular Adhesive
Standard Warranties	Nexus Modular Commercialon Adhesive for Modular Carpet & LVT APEX® SDP Polyester Fiber
Optional Warranties	Commercialon High Moisture Adhesive for Modular Carpet and LVT

Special Technologies

Environmental Specifications & Tests

NSF 140:	Gold Certified
Total Recycled Content	40.71%
Flooring Radiant Panel	Class 1
Smoke Density	Less then 450 flaming (ASTM E 662)
Static Test	Less then 4 kv (AATCC-134)
ADA Compliance	Compliant For Accessible Routes
Pill Test	Yes
Lightfastness	Yes

Installation Methods: Brick, Quarter Turn, Monolithic, Ashlar


Colorways



3534 Redirect



3535 Domain



3536 Filter



3537 Search



3538 Hosting



3539 Image Ov...



3540 Wireframe



3541 Meta Tag



3542 Cookies





Product Specifications

Construction	Patterned Loop
Backing	Nexus® Modular
Dye Method	Solution Dyed
Fiber Type	APEX SDP® Polyester
Face Weight	20 oz./sy (678 grams/m2)
Pile Density	5414 oz./y3 (200.75 kg/m3)
Pattern Repeat	N/A
Gauge	1/12 (4.72 rows/cm)
Standard Size	24" x 24" approx. (60.96cm x 60.96cm)
Standard Adhesive	Commercialon Premium Modular Adhesive
Optional Adhesive	TileTabs
Standard Warranties	Nexus Modular Commercialon Adhesive for Modular Carpet & LVT APEX® SDP Polyester Fiber
Optional Warranties	Commercialon High Moisture Adhesive for Modular Carpet and LVT Tile Tabs


Special Technologies

Environmental Specifications & Tests


NSF 140:	Gold Certified
Total Recycled Content	40.71%
Flooring Radiant Panel	Class 1
Smoke Density	Less than 450 flaming (ASTM E 662)
Static Test	Less than 4 kv (AATCC-134)
ADA Compliance	Compliant For Accessible Routes
Pill Test	Yes
Lightfastness	Yes

Installation Methods: Brick, Quarter Turn, Monolithic, Ashlar

Colorways



3534 Redirect



3535 Domain



3536 Filter



3537 Search




3538 Hosting




3539 Image Ov...



3540 Wireframe



3541 Meta Tag



3542 Cookies





Product Specifications

Construction	Patterned Loop
Backing	Nexus® Modular
Dye Method	Solution Dyed
Fiber Type	APEX SDP® Polyester
Face Weight	16 oz./sy (543 grams/m2)
Pile Density	6127 oz./y3 (227.19 kg/m3)
Pattern Repeat	N/A
Gauge	1/12 (4.72 rows/cm)
Standard Size	24" x 24" approx. (60.96cm x 60.96cm)
Standard Adhesive	Commercialon Premium Modular Adhesive
Optional Adhesive	TileTabs
Standard Warranties	Nexus Modular Commercialon Adhesive for Modular Carpet & LVT APEX® SDP Polyester Fiber
Optional Warranties	Commercialon High Moisture Adhesive for Modular Carpet and LVT Tile Tabs

Special Technologies

Environmental Specifications & Tests


NSF 140:	Gold Certified
Total Recycled Content	42.95%
Flooring Radiant Panel	Class 1
Smoke Density	Less than 450 flaming (ASTM E 662)
Static Test	Less than 4 kv (AATCC-134)
ADA Compliance	Compliant For Accessible Routes
Pill Test	Yes
Lightfastness	Yes

Installation Methods: Brick, Quarter Turn, Monolithic, Ashlar

Colorways



3463 Mesmeriz...




3464 Trance



3465 Soothing



3466 Numbing



3467 Spellbound



3468 Mesmeric



3469 Soporific



3470 Bewitch



3471 Nirvana





Product Specifications

Construction	Patterned Loop
Backing	Nexus® Modular
Dye Method	Solution Dyed
Fiber Type	APEX SDP® Polyester
Face Weight	16 oz./sy (543 grams/m2)
Pile Density	6662 oz./y3 (247.03 kg/m3)
Pattern Repeat	N/A
Gauge	1/12 (4.72 rows/cm)
Standard Size	24" x 24" approx. (60.96cm x 60.96cm)
Standard Adhesive	Commercialon Premium Modular Adhesive
Optional Adhesive	TileTabs
Standard Warranties	Nexus Modular Commercialon Adhesive for Modular Carpet & LVT APEX® SDP Polyester Fiber
Optional Warranties	Commercialon High Moisture Adhesive for Modular Carpet and LVT Tile Tabs




Special Technologies

Environmental Specifications & Tests

NSF 140:	Gold Certified
Total Recycled Content	42.95%
Flooring Radiant Panel	Class 1
Smoke Density	Less then 450 flaming (ASTM E 662)
Static Test	Less then 4 kv (AATCC-134)
ADA Compliance	Compliant For Accessible Routes
Pill Test	Yes
Lightfastness	Yes

Installation Methods: Brick, Quarter Turn, Monolithic, Ashlar

Colorways

 3248 Advocate	 3249 Referer	 3250 Loyalist	 3251 Marketing	 3252 Network	 3253 Mavens
 3254 Vlogger	 3255 Blogger	 3256 Media	 3257 Brand		





Product Specifications

Construction	Patterned Loop
Backing	Nexus® Modular
Dye Method	Solution Dyed
Fiber Type	APEX SDP® Polyester
Face Weight	16 oz./sy (543 grams/m2)
Pile Density	6275 oz./y3 (232.68 kg/m3)
Pattern Repeat	N/A
Gauge	1/10 (3.94 rows/cm)
Standard Size	24" x 24" approx. (60.96cm x 60.96cm)
Standard Adhesive	Commercialon Premium Modular Adhesive
Optional Adhesive	TileTabs
Standard Warranties	Nexus Modular Commercialon Adhesive for Modular Carpet & LVT APEX® SDP Polyester Fiber
Optional Warranties	Commercialon High Moisture Adhesive for Modular Carpet and LVT Tile Tabs

Special Technologies

Environmental Specifications & Tests


NSF 140:	Gold Certified
Total Recycled Content	42.95%
Flooring Radiant Panel	Class 1
Smoke Density	Less than 450 flaming (ASTM E 662)
Static Test	Less than 4 kv (AATCC-134)
ADA Compliance	Compliant For Accessible Routes
Pill Test	Yes
Lightfastness	Yes

Installation Methods: Brick, Quarter Turn, Monolithic, Ashlar


Colorways




2213 Straight Fo...




2214 Groove



2215 Beeline



3301 In-Line



3309 Nonstop



3311 Plumb



3312 Tangent



3314 Axis



3315 Weft





Product Specifications

Construction	Patterned Loop
Backing	Nexus® Modular
Dye Method	Solution Dyed
Fiber Type	APEX SDP® Polyester
Face Weight	18 oz./sy (610 grams/m2)
Pile Density	6416 oz./y3 (237.91 kg/m3)
Pattern Repeat	N/A
Gauge	1/12 (4.72 rows/cm)
Standard Size	24" x 24" approx. (60.96cm x 60.96cm)
Standard Adhesive	Commercialon Premium Modular Adhesive
Optional Adhesive	TileTabs
Standard Warranties	Nexus Modular Commercialon Adhesive for Modular Carpet & LVT APEX® SDP Polyester Fiber
Optional Warranties	Commercialon High Moisture Adhesive for Modular Carpet and LVT Tile Tabs

Special Technologies

Environmental Specifications & Tests


NSF 140:	Gold Certified
Total Recycled Content	41.8%
Flooring Radiant Panel	Class 1
Smoke Density	Less than 450 flaming (ASTM E 662)
Static Test	Less than 4 kv (AATCC-134)
ADA Compliance	Compliant For Accessible Routes
Pill Test	Yes
Lightfastness	Yes

Installation Methods: Brick, Quarter Turn, Monolithic, Ashlar

Colorways



3135 Indigo



3136 Royal Pur...




3137 Midnight




3138 Chili Red




3139 Crimson




3140 Carob



3141 Matte Lake




3142 Sunburst



3143 Medallion



3144 Cyber



3145 Ocean Tro..



3146 Cloud



3147 Parrot



3171 Skyrocket





Product Specifications

Construction	Patterned Loop
Backing	Nexus® Modular
Dye Method	Solution Dyed
Fiber Type	APEX SDP® Polyester
Face Weight	18 oz./sy (610 grams/m2)
Pile Density	5829 oz./y3 (216.14 kg/m3)
Pattern Repeat	N/A
Gauge	1/10 (3.94 rows/cm)
Standard Size	24" x 24" approx. (60.96cm x 60.96cm)
Standard Adhesive	Commercialon Premium Modular Adhesive
Optional Adhesive	TileTabs
Standard Warranties	Nexus Modular Commercialon Adhesive for Modular Carpet & LVT APEX® SDP Polyester Fiber
Optional Warranties	Commercialon High Moisture Adhesive for Modular Carpet and LVT Tile Tabs

Special Technologies

Environmental Specifications & Tests

NSF 140:	Gold Certified
Total Recycled Content	41.8%
Flooring Radiant Panel	Class 1
Smoke Density	Less than 450 flaming (ASTM E 662)
Static Test	Less than 4 kv (AATCC-134)
ADA Compliance	Compliant For Accessible Routes
Pill Test	Yes
Lightfastness	Yes

Installation Methods: Quarter Turn, Ashlar

Colorways



2784 Sahara




2785 Gobi




2786 Karakum




2787 Mojave



2788 Sonoran



2789 Basin



2790 Namib





Product Specifications

Construction	Patterned Loop
Backing	Nexus® Modular
Dye Method	Solution Dyed
Fiber Type	APEX SDP® Polyester
Face Weight	20 oz./sy (678 grams/m2)
Pile Density	5414 oz./y3 (200.75 kg/m3)
Pattern Repeat	N/A
Gauge	1/12 (4.72 rows/cm)
Standard Size	24" x 24" approx. (60.96cm x 60.96cm)
Standard Adhesive	Commercialon Premium Modular Adhesive
Optional Adhesive	TileTabs
Standard Warranties	Nexus Modular Commercialon Adhesive for Modular Carpet & LVT APEX® SDP Polyester Fiber
Optional Warranties	Commercialon High Moisture Adhesive for Modular Carpet and LVT Tile Tabs

Special Technologies

Environmental Specifications & Tests

NSF 140:	Gold Certified
Total Recycled Content	40.71%
Flooring Radiant Panel	Class 1
Smoke Density	Less than 450 flaming (ASTM E 662)
Static Test	Less than 4 kv (AATCC-134)
ADA Compliance	Compliant For Accessible Routes
Pill Test	Yes
Lightfastness	Yes

Installation Methods: Brick, Quarter Turn, Monolithic, Ashlar

Colorways



3534 Redirect



3535 Domain




3536 Filter



3537 Search



3538 Hosting



3539 Image Ov...



3540 Wireframe



3541 Meta Tag



3542 Cookies





Product Specifications

Construction	Patterned Loop
Backing	Nexus® Modular
Dye Method	Solution Dyed
Fiber Type	APEX SDP® Polyester
Face Weight	16 oz./sy (543 grams/m2)
Pile Density	7243 oz./y3 (268.58 kg/m3)
Pattern Repeat	N/A
Gauge	1/12 (4.72 rows/cm)
Standard Size	24" x 24" approx. (60.96cm x 60.96cm)
Standard Adhesive	Commercialon Premium Modular Adhesive
Optional Adhesive	TileTabs
Standard Warranties	Nexus Modular Commercialon Adhesive for Modular Carpet & LVT APEX® SDP Polyester Fiber
Optional Warranties	Commercialon High Moisture Adhesive for Modular Carpet and LVT Tile Tabs


Special Technologies

Environmental Specifications & Tests


NSF 140:	Gold Certified
Total Recycled Content	42.95%
Flooring Radiant Panel	Class 1
Smoke Density	Less than 450 flaming (ASTM E 662)
Static Test	Less than 4 kv (AATCC-134)
ADA Compliance	Compliant For Accessible Routes
Pill Test	Yes
Lightfastness	Yes

Installation Methods: Brick, Quarter Turn, Monolithic, Ashlar


Colorways




3135 Indigo




3136 Royal Pur...



3137 Midnight



3138 Chili Red




3139 Crimson




3140 Carob




3141 Matte Lake



3142 Sunburst



3143 Medallion




3144 Cyber



3145 Ocean Tro..



3146 Cloud



3147 Parrot





Product Specifications

Backing	Nexus® Modular
Dye Method	Solution Dyed
Fiber Type	APEX SDP® Polyester
Face Weight	16 oz./sy (543 grams/m2)
Pile Density	6275 oz./y3 (232.68 kg/m3)
Pattern Repeat	N/A
Gauge	1/10 (3.94 rows/cm)
Standard Size	24" x 24" approx. (60.96cm x 60.96cm)
Standard Adhesive	Commercialon Premium Modular Adhesive
Optional Adhesive	TileTabs
Standard Warranties	Nexus Modular Commercialon Adhesive for Modular Carpet & LVT APEX® SDP Polyester Fiber
Optional Warranties	Commercialon High Moisture Adhesive for Modular Carpet and LVT Tile Tabs


Special Technologies

Environmental Specifications & Tests


NSF 140:	Gold Certified
Total Recycled Content	42.95%
Flooring Radiant Panel	Class 1
Smoke Density	Less than 450 flaming (ASTM E 662)
Static Test	Less than 4 kv (AATCC-134)
ADA Compliance	Compliant For Accessible Routes
Pill Test	Yes
Lightfastness	Yes

Installation Methods: Brick, Quarter Turn, Monolithic, Ashlar


Colorways




2211 Renewal




2212 Awakening




2213 Stimulus



2214 Eye-Opener



2215 Scoop



2216 Impact





Product Specifications

Backing	Nexus® Modular
Dye Method	Solution Dyed
Fiber Type	APEX SDP® Polyester
Face Weight	16 oz./sy (543 grams/m2)
Pile Density	6270 oz./y3 (232.50 kg/m3)
Pattern Repeat	N/A
Gauge	1/12 (4.72 rows/cm)
Standard Size	24" x 24" approx. (60.96cm x 60.96cm)
Standard Adhesive	Commercialon Premium Modular Adhesive
Optional Adhesive	TileTabs
Standard Warranties	Nexus Modular Commercialon Adhesive for Modular Carpet & LVT APEX® SDP Polyester Fiber
Optional Warranties	Commercialon High Moisture Adhesive for Modular Carpet and LVT Tile Tabs


Special Technologies

Environmental Specifications & Tests


NSF 140:	Gold Certified
Total Recycled Content	42.95%
Flooring Radiant Panel	Class 1
Smoke Density	Less than 450 flaming (ASTM E 662)
Static Test	Less than 4 kv (AATCC-134)
ADA Compliance	Compliant For Accessible Routes
Pill Test	Yes
Lightfastness	Yes

Installation Methods: Brick, Quarter Turn, Monolithic, Ashlar

Colorways




1812 Shake-up



1813 Transform...




1814 Mutiny




1815 Uproar



1816 Turmoil



1817 Revolt



1818 Uprising





Product Specifications

Backing	Nexus® Modular
Dye Method	Solution Dyed
Fiber Type	APEX SDP® Polyester
Face Weight	16 oz./sy (543 grams/m2)
Pile Density	7362 oz./y3 (272.99 kg/m3)
Pattern Repeat	N/A
Gauge	1/12 (4.72 rows/cm)
Standard Size	24" x 24" approx. (60.96cm x 60.96cm)
Standard Adhesive	Commercialon Premium Modular Adhesive
Optional Adhesive	TileTabs
Standard Warranties	Nexus Modular Commercialon Adhesive for Modular Carpet & LVT APEX® SDP Polyester Fiber
Optional Warranties	Commercialon High Moisture Adhesive for Modular Carpet and LVT Tile Tabs


Special Technologies

Environmental Specifications & Tests

NSF 140:	Gold Certified
Total Recycled Content	42.95%
Flooring Radiant Panel	Class 1
Smoke Density	Less than 450 flaming (ASTM E 662)
Static Test	Less than 4 kv (AATCC-134)
ADA Compliance	Compliant For Accessible Routes
Pill Test	Yes
Lightfastness	Yes

Installation Methods: Quarter Turn

Colorways



2759 Arid Gray



2760 Desert Sp...




2761 Mica Dust




2762 Camelback



2763 Silver Mine



2764 Caravan



2765 Indian Paint



2766 Night Sky



2767 Obsidian





Product Specifications

Construction	Patterned Loop
Backing	Nexus® Modular
Dye Method	Solution Dyed
Fiber Type	APEX SDP® Polyester
Face Weight	16 oz./sy (543 grams/m2)
Pile Density	4645 oz./y3 (172.24 kg/m3)
Pattern Repeat	N/A
Gauge	1/12 (4.72 rows/cm)
Standard Size	24" x 24" approx. (60.96cm x 60.96cm)
Standard Adhesive	Commercialon Premium Modular Adhesive
Optional Adhesive	TileTabs
Standard Warranties	Nexus Modular Commercialon Adhesive for Modular Carpet & LVT APEX® SDP Polyester Fiber
Optional Warranties	Commercialon High Moisture Adhesive for Modular Carpet and LVT Tile Tabs

Special Technologies

Environmental Specifications & Tests


NSF 140:	Gold Certified
Total Recycled Content	42.95%
Flooring Radiant Panel	Class 1
Smoke Density	Less then 450 flaming (ASTM E 662)
Static Test	Less then 4 kv (AATCC-134)
ADA Compliance	Compliant For Accessible Routes
Pill Test	Yes
Lightfastness	Yes

Installation Methods: Brick, Quarter Turn, Monolithic, Ashlar


Colorways



3445 Guide




3446 Molded




3447 Patterning



3448 Template




3449 Impression



3450 Depression



3451 Stamped



3452 Structured



3453 Repeat





Product Specifications

Backing	Nexus® Modular
Dye Method	Solution Dyed
Fiber Type	Encore® SD Nylon
Face Weight	15 oz./sy (509 grams/m2)
Pile Density	7249 oz./y3 (268.80 kg/m3)
Pattern Repeat	N/A
Gauge	1/10 (3.94 rows/cm)
Standard Size	24" x 24" approx. (60.96cm x 60.96cm)
Standard Adhesive	Commercialon Premium Modular Adhesive
Optional Adhesive	TileTabs
Standard Warranties	Nexus Modular Commercialon Adhesive for Modular Carpet & LVT Encore SD Fiber
Optional Warranties	Commercialon High Moisture Adhesive for Modular Carpet and LVT Tile Tabs

Special Technologies

Environmental Specifications & Tests

NSF 140:	Gold Certified
Total Recycled Content	43.54%
Flooring Radiant Panel	Class 1
Smoke Density	Less than 450 flaming (ASTM E 662)
Static Test	Less than 4 kv (AATCC-134)
ADA Compliance	Compliant For Accessible Routes
Pill Test	Yes
Lightfastness	Yes

Installation Methods: Brick, Quarter Turn, Monolithic, Ashlar

Colorways

 2934 High Defini...	 2935 4K	 2936 Adaptive	 2937 Wi-Fi	 2938 Html	 2939 Graphics
 2940 Buffering	 2941 Firewall	 2942 Bandwidth	 2944 Aspect	 2945 Latency	 2946 Encoding





Product Specifications

Construction	Patterned Loop
Backing	Nexus® Modular
Dye Method	Solution Dyed
Fiber Type	Encore® SD Nylon
Face Weight	15 oz./sy (509 grams/m2)
Pile Density	6740 oz./y3 (249.92 kg/m3)
Pattern Repeat	N/A
Gauge	1/12 (4.72 rows/cm)
Standard Size	24" x 24" approx. (60.96cm x 60.96cm)
Standard Adhesive	Commercialon Premium Modular Adhesive
Optional Adhesive	TileTabs
Standard Warranties	Nexus Modular Commercialon Adhesive for Modular Carpet & LVT Encore SD Fiber
Optional Warranties	Commercialon High Moisture Adhesive for Modular Carpet and LVT Tile Tabs


Special Technologies

Environmental Specifications & Tests

NSF 140:	Gold Certified
Total Recycled Content	43.54%
Flooring Radiant Panel	Class 1
Smoke Density	Less than 450 flaming (ASTM E 662)
Static Test	Less than 4 kv (AATCC-134)
ADA Compliance	Compliant For Accessible Routes
Pill Test	Yes
Lightfastness	Yes

Installation Methods: Brick, Quarter Turn, Monolithic, Ashlar

Colorways



2173 Cache



2174 Encryption



2175 BIOS



2176 PDF




2177 Server




2178 ISP



2179 Driver



2180 Registry



2181 Framework





Product Specifications

Backing	Nexus® Modular
Dye Method	Solution Dyed
Fiber Type	Encore® SD Nylon
Face Weight	15 oz./sy (509 grams/m2)
Pile Density	6300 oz./y3 (233.61 kg/m3)
Pattern Repeat	N/A
Gauge	1/12 (4.72 rows/cm)
Standard Size	24" x 24" approx. (60.96cm x 60.96cm)
Standard Adhesive	Commercialon Premium Modular Adhesive
Optional Adhesive	TileTabs
Standard Warranties	Nexus Modular Commercialon Adhesive for Modular Carpet & LVT Encore SD Fiber
Optional Warranties	Commercialon High Moisture Adhesive for Modular Carpet and LVT Tile Tabs

Special Technologies

Environmental Specifications & Tests

NSF 140:	Gold Certified
Total Recycled Content	43.54%
Flooring Radiant Panel	Class 1
Smoke Density	Less than 450 flaming (ASTM E 662)
Static Test	Less than 3 kv (AATCC-134)
ADA Compliance	Compliant For Accessible Routes
Pill Test	Yes
Lightfastness	Yes

Installation Methods: Brick, Quarter Turn, Monolithic, Ashlar


Colorways



3052 Ecliptic




3053 Zodiac




3054 Galaxy




3055 Aurora



3056 Celestial



3057 Juno



3058 Ceres



3059 Nadir



3060 Zenith



3061 Cosmic





Product Specifications

Construction	Textured Loop
Backing	Nexus® Modular
Dye Method	Solution Dyed
Fiber Type	APEX SDP® Polyester
Face Weight	15 oz./sy (509 grams/m2)
Pile Density	5133 oz./y3 (190.33 kg/m3)
Pattern Repeat	N/A
Gauge	1/10 (3.94 rows/cm)
Standard Size	24" x 24" approx. (60.96cm x 60.96cm)
Standard Adhesive	Commercialon Premium Modular Adhesive
Optional Adhesive	TileTabs
Standard Warranties	Nexus Modular Commercialon Adhesive for Modular Carpet & LVT APEX® SDP Polyester Fiber
Optional Warranties	Commercialon High Moisture Adhesive for Modular Carpet and LVT Tile Tabs

Special Technologies

Environmental Specifications & Tests


NSF 140:	Gold Certified
Total Recycled Content	43.54%
Flooring Radiant Panel	Class 1
Smoke Density	Less than 450 flaming (ASTM E 662)
Static Test	Less than 4 kv (AATCC-134)
ADA Compliance	Compliant For Accessible Routes
Pill Test	Yes
Lightfastness	Yes

Installation Methods: Brick, Quarter Turn, Monolithic, Ashlar

Colorways

 185 Fiesta	 2152 Tungsten	 3120 Shadow	 3121 Charcoal	 3122 Denim	 3123 Praline
 3124 Red	 3125 Pewter	 3126 Steel	 3128 Licorice	 3129 Ash	 3130 Brown
 3131 Pecan	 316 Royal	 860 London Fog	 997 Caviar		



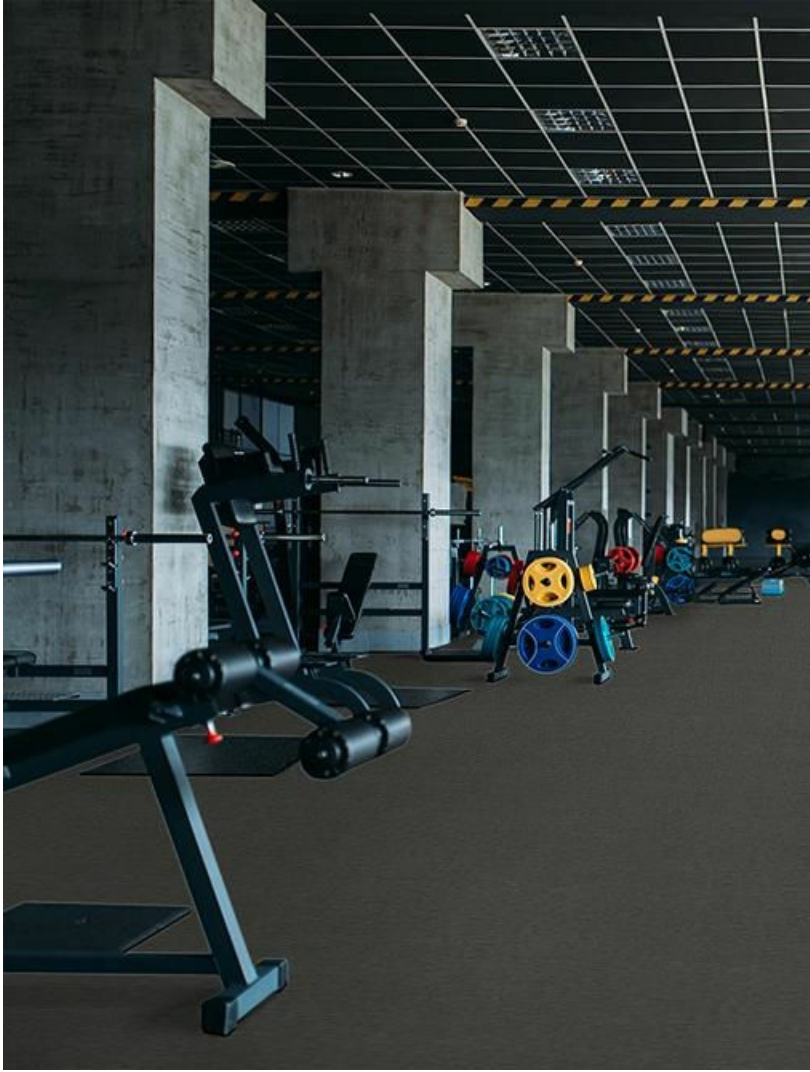

Product Specifications

Construction	Textured Loop
Backing	Nexus® Modular
Dye Method	Solution Dyed
Fiber Type	APEX SDP® Polyester
Face Weight	15 oz./sy (509 grams/m2)
Pile Density	5133 oz./y3 (190.33 kg/m3)
Pattern Repeat	N/A
Gauge	1/10 (3.94 rows/cm)
Standard Size	24" x 24" approx. (60.96cm x 60.96cm)
Standard Adhesive	Commercialon Premium Modular Adhesive
Optional Adhesive	TileTabs
Standard Warranties	Nexus Modular Commercialon Adhesive for Modular Carpet & LVT APEX® SDP Polyester Fiber
Optional Warranties	Commercialon High Moisture Adhesive for Modular Carpet and LVT Tile Tabs

Special Technologies

Environmental Specifications & Tests

NSF 140:	Gold Certified
Total Recycled Content	43.54%
Flooring Radiant Panel	Class 1
Smoke Density	Less then 450 flaming (ASTM E 662)
Static Test	Less then 4 kv (AATCC-134)
ADA Compliance	Compliant For Accessible Routes
Pill Test	Yes
Lightfastness	Yes

Installation Methods: Brick, Quarter Turn, Monolithic, Ashlar

Colorways

 185 Fiesta	 2152 Tungsten	 3120 Shadow	 3121 Charcoal	 3122 Denim	 3123 Praline
 3124 Red	 3126 Steel	 3127 Noir	 3128 Licorice	 3129 Ash	 3130 Brown
 3131 Pecan	 316 Royal	 860 London Fog	 997 Caviar		





Product Specifications

Backing	Nexus® Modular
Dye Method	Solution Dyed
Fiber Type	APEX SDP® Polyester
Face Weight	20 oz./sy (678 grams/m2)
Pile Density	5414 oz./y3 (200.75 kg/m3)
Pattern Repeat	N/A
Gauge	1/12 (4.72 rows/cm)
Standard Size	24" x 24" approx. (60.96cm x 60.96cm)
Standard Adhesive	Commercialon Premium Modular Adhesive
Optional Adhesive	TileTabs
Standard Warranties	Nexus Modular Commercialon Adhesive for Modular Carpet & LVT APEX® SDP Polyester Fiber
Optional Warranties	Commercialon High Moisture Adhesive for Modular Carpet and LVT Tile Tabs

Special Technologies

Environmental Specifications & Tests

NSF 140:	Gold Certified
Total Recycled Content	40.71%
Flooring Radiant Panel	Class 1
Smoke Density	Less than 450 flaming (ASTM E 662)
Static Test	Less than 4 kv (AATCC-134)
ADA Compliance	Compliant For Accessible Routes
Pill Test	Yes
Lightfastness	Yes

Installation Methods: Brick, Quarter Turn, Monolithic, Ashlar

Colorways



3388 Certainty



3389 Matter of ...



3390 Cold Hard ...



3391 Done Deal



3392 Fact of Life



3393 Sure Thing



3394 All Sewn Up



3395 Sure Bet



3396 Shoo-In





Product Specifications

Construction	Patterned Loop
Backing	Nexus® Modular
Dye Method	Solution Dyed
Fiber Type	Encore® SD Nylon
Face Weight	15 oz./sy (509 grams/m2)
Pile Density	4811 oz./y3 (178.39 kg/m3)
Pattern Repeat	N/A
Gauge	1/12 (4.72 rows/cm)
Standard Size	24" x 24" approx. (60.96cm x 60.96cm)
Standard Adhesive	Commercialon Premium Modular Adhesive
Optional Adhesive	TileTabs
Standard Warranties	Nexus Modular Commercialon Adhesive for Modular Carpet & LVT Encore SD Fiber
Optional Warranties	Commercialon High Moisture Adhesive for Modular Carpet and LVT Tile Tabs

Special Technologies

Environmental Specifications & Tests

NSF 140:	Gold Certified
Total Recycled Content	43.54%
Flooring Radiant Panel	Class 1
Smoke Density	Less than 450 flaming (ASTM E 662)
Static Test	Less than 4 kv (AATCC-134)
ADA Compliance	Compliant For Accessible Routes
Pill Test	Yes
Lightfastness	Yes

Installation Methods: Brick, Quarter Turn, Monolithic, Ashlar


Colorways



3111 Ethos




3112 Nucleus




3113 Lifeblood



3114 Core



3115 Substance




3116 Spirit



3117 Quintesse...



3118 Nature



3119 Soul

